


TECHNICAL DATA SHEET



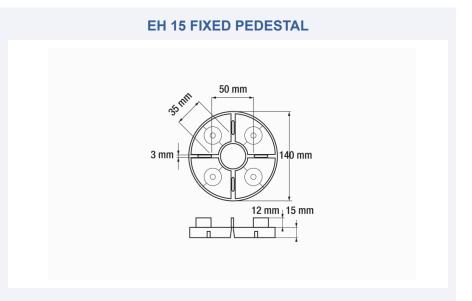

ITEM SPECIFICATION	
	EH fixed type pedestal for raised floors. Pedestals are composed by a unique element in polypropylene of 140mm diameter base for resting on the laying surface and of 15 mm high. On the upper part it is provided of 4 tabs of h.12 mm in 3 mm thickness. Base is provided of holes for water drainage.

PRODUCT RANGE	PEDESTAL
PRODUCT NAME	EH 15
CHARACTERISTICS	Fixed pedestal compatible with one or more balancers of 5mm highness. Easy breakable in 2, 3 or 4 parts in case of need for wall or internal or external corner application. Possibility of stack up maximum 2 fixed pedestals, also combining different highness.
RAW MATERIAL	Polypropylene
ENVIRONMENTAL IMPACT	recyclable material - non dangerous
APPLICATIONS SURFACES	On any waterproofing membrane, or any insulating panel or any compact and solid surface
APPLICATIONS AREA	Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE	
BASE DIAMETER	mm	140	+/- mm 1,0	
BASE THICKNESS	mm		+/- mm 0,2	
MINIMUM HEIGHNESS	mm	15	+/- mm 1,0	
TABS THICKNESS	mm	3	+/- mm 0,2	
TABS HIGHNESS	mm	12	+/- mm 0,2	
WEIGHT	kg	0,046	+/- 5 %	
TECHNICAL PROPERTIES		UNIT	VALUE	
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* (calculated at medium highness, between minimum and maximum extension)		KN	55,13	
SHORE		Shore d	70 (+/- 3)	
*Tests made by Civil and Environmental Department of University of Pad PHYSICAL PROPERTIES	ova. 1 KN = 98,6 Kg METHOD	UNIT	VALUE	
	WETTOD	ONT	VALUE	
FIRE REACTION*	UNI EN 13501-1:2009	class	Е	
LOW TEMPERATURES REACTION			-40°	
*Tests made by Giordano S.p.A. Institute of Bellaria-Iqea Marina (RN)-Ital	У			
PACKAGING AND STORAGE				
PIECES PER BOX	200			
PIECES PER PALLET	20			
BOX DIMENSION	cm 39,5x60x42,5			
BOX WEIGHT	kg 10,20			
PALLET DIMENSION	cm 80 x 120			
The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.				
LAVING GERUF PROPUSE				
LAYING OF THE PRODUCT				

LATING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing

The above data are relevant to current production and may be changed or updated by Eterno Ivica at any time without notice. Given the many possible uses and the possible interference of external elements, we do not assume responsibility for the results. The buyer is required to establish under their own responsibility the suitability of the product for the intended use. This document is property of Eterno Ivica. All rights reserved.





